



A series of modified polypropylene materials for melt blown have been developed by selecting polypropylene base materials with high regularity, which can meet the functional requirements of medical protection, filtering equipment, sanitation and cleaning, sound absorption and noise reduction, nonwoven fabric, etc.

Item	Test Method	Unit	Z-1200	Z-1500	Z-1800	➤ Property
MFR(230℃ /2.16kg)	ISO 1133-1	g/10min	1200	1500	1800	This series of products can meet the requirements of customers for hydrostatic pressure, heat resistance and attenuation resistance, and can provide customized services.
Ash Content	ISO 3451-1	%	0.015	0.015	0.018	
Volatile	ISO 1269	%	0.15	0.15	0.17	
MWD	ISO 16014-4	-	3.2	2.8	3.0	

- Attention: Above values are only typical performance values, not as product performance limits.
- Package: 25kg/bag or 600kg/bag.

➤ Features

Dawn melt blown PP has good processing performance, good quality stability, can meet the requirements of lower ash content, lower odor, and meet the Rosh standard.

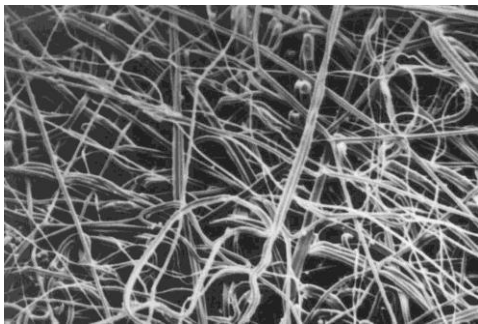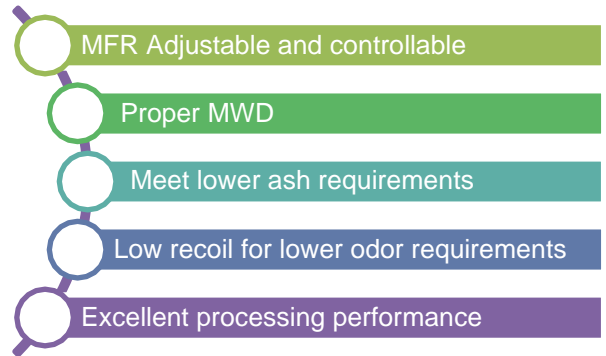

➤ Good Formability

The surface of melt blown PP non-woven fabric has uniform and fine fiber structure.

➤ Application

Dawn melt blown PP series are widely used in safety protection, personal hygiene, sound absorption and noise reduction, industrial manufacturing, environmental protection and other fields



Email: advert@chinadawn.cn
 Phone: (+86)18801122364
 Whatsapp: (+86)18638700703